CROSS BAR AND TRAY DIVIDER INSTALLATION

TOOLS NEEDED

- 5/32" Hex wrench
- 3/16" Hex wrench

HARDWARE

- TOTAL HARDWARE QUANTITIES ARE DEPENDENT ON ITEMS PURCHASED

- Hardware included for each CROSS BAR :

(8) 1/2" long countersink screws
(8) T-slot nuts

- Hardware included for each TRAY DIVIDER :

(3) 1/2"long button head screws
(3) T-slot nuts

STEP 1:
INSTALL FOOT FASTENERS

- Install four (4) 1/2" long countersink screws and T-slot nuts into each foot as shown. Leave loose.

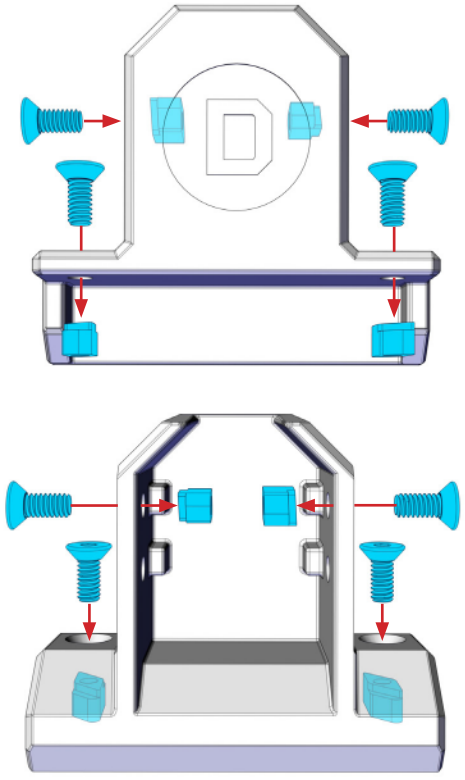

NOTE: If installing two Cross Bars with one being mounted on the High Sides, use the lower mounting holes on the Cross Bar foot mounted on the High Sides to keep the Cross Bars level with each other. DETAIL A.

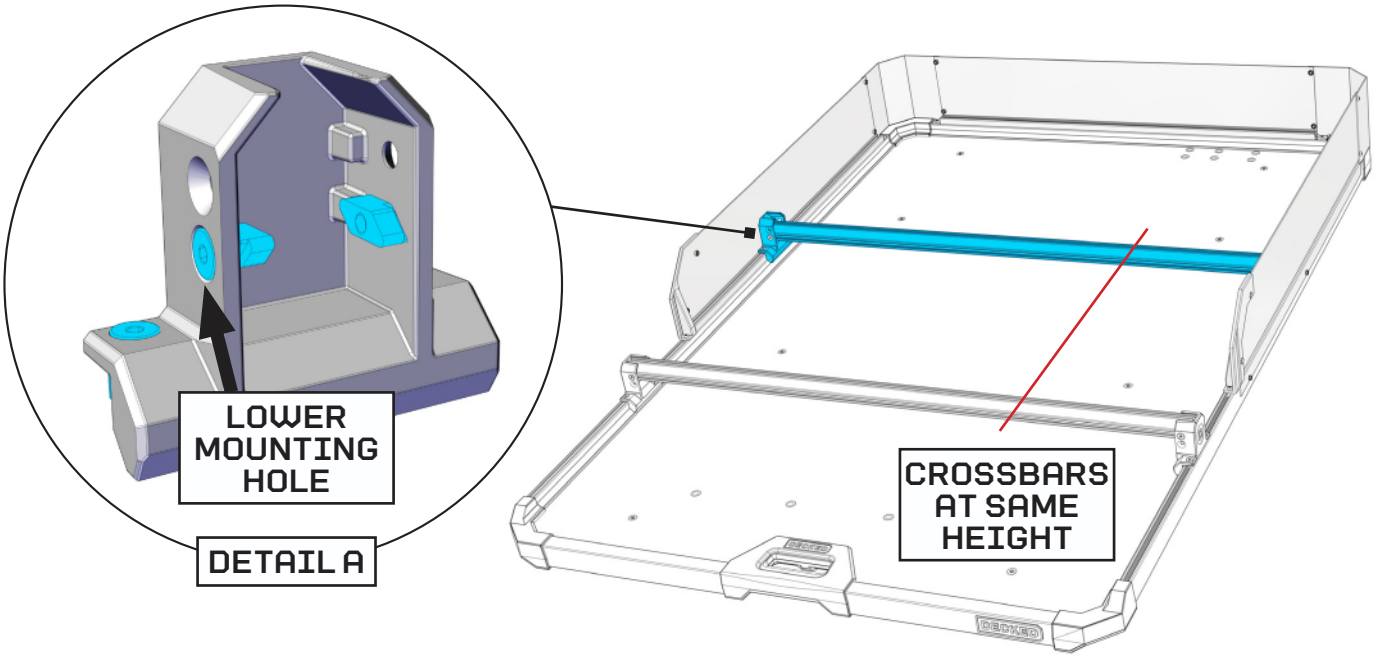

STEP 2:
INSTALL CROSS BAR

- Confirm the Cross Bar T-slot nuts are horizontal.
- Position the Cross Bar with the mounting channel facing up and slide the Cross Bar over each T-slot nut and into each riser. DETAIL A.
- Tighten the Cross Bar screws hand-tight to keep assembly in place for installation onto the CargoGlide side rails.
- Position Cross Bar and risers over the CargoGlide side rails or High Sides. Insert the T-slot nuts into the tracks.
- Position the Cross Bar where desired. Tighten the Cross Bar and T-slot nut screws.

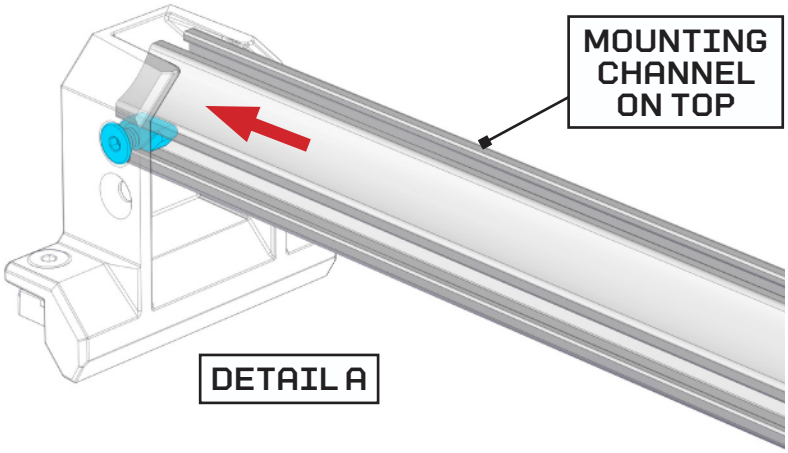
MOUNTING
CHANNEL
ON TOP
DETAIL A

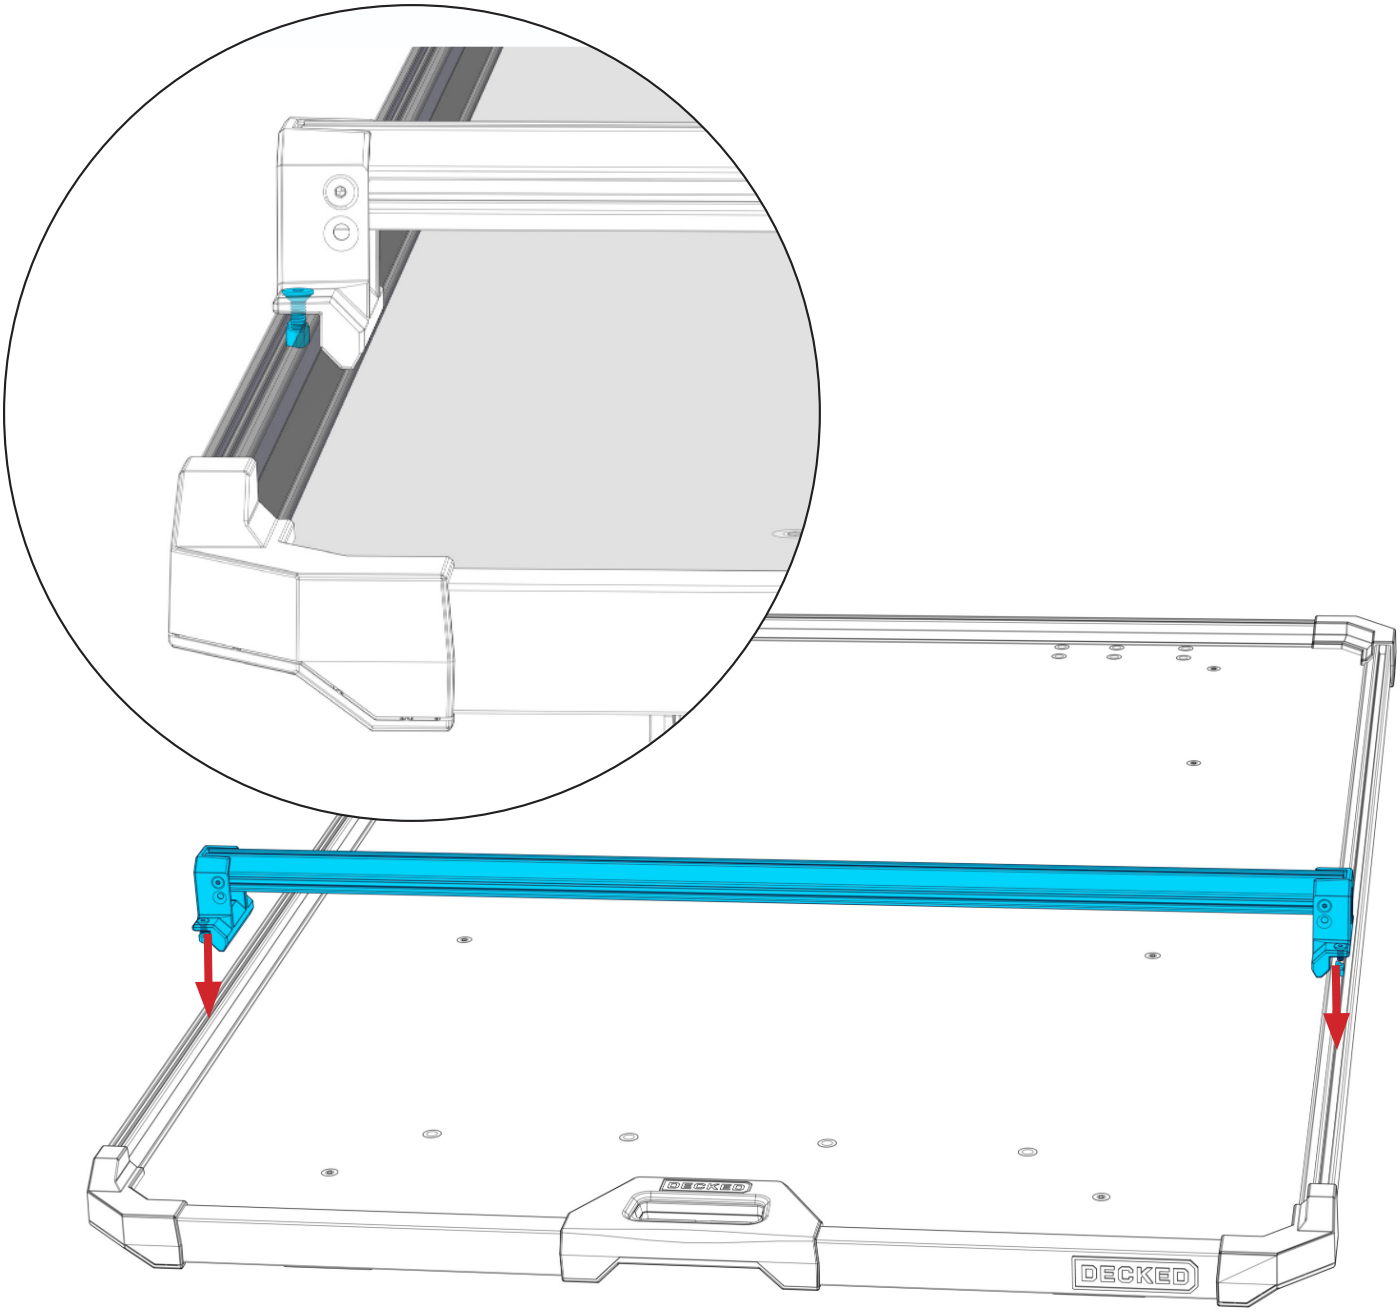
DECKED
DECKED